


## Transmitter operation description

- 1. Unlock Settings:** Hold down the 'Unlock' key, the 'Lock' symbol disappears on the display, indicating that the unlock is successful.
- 2. Channel adjustment:** After unlocking, press the 'Up' or 'Down' key to switch to the required channel.
- 3. MIC volume adjustment:** After unlocking, press the 'Mic.gain' key to adjust the microphone input volume.
- 4. Mute setting:** In normal working state, press and hold the 'mute' key for 3 seconds, and the microphone is in the mute state. Press this key again to unmute.
- 5. Power adjustment:** hold down the 'Mic.Gain' key and the 'Up' key at the same time, and turn on the device, the display will display 'H', indicating high power, repeat the operation after shutting down, and the display 'L' indicates low power.
- 6. One-click frequency matching of all auxiliary machines:** After unlocking, the host adjusts the channel, and CHS is displayed on the display, indicating that the frequency matching is being performed. After the machine is automatically locked, the frequency matching ends.
- 7. Set the frequency band:** press and hold Down the "Up" and "Down" keys at the same time, and turn on the screen, the frequency will be displayed instantly. Repeat this cycle to the desired frequency range.
- 8. Headset volume adjustment:** Without unlocking, press the 'Up' or 'Down' key to adjust the headset output volume directly.

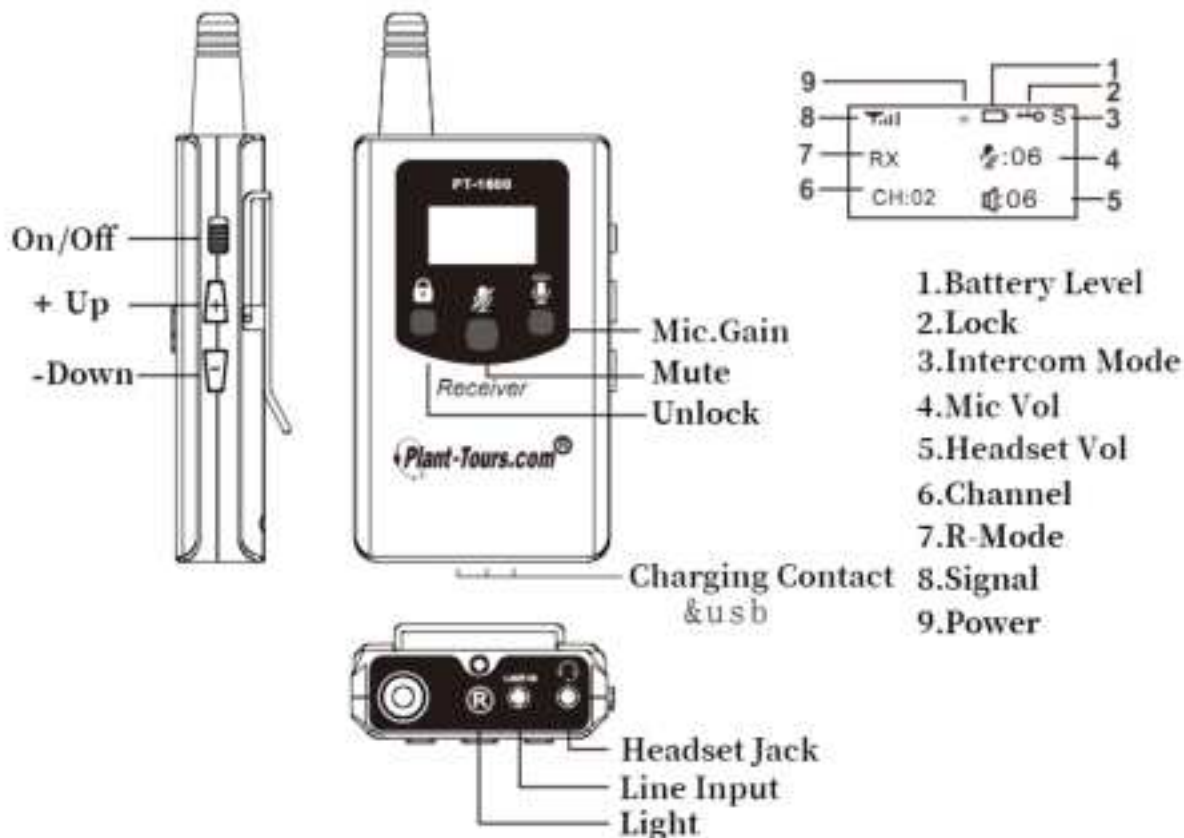

## Receiver operating instructions

**Function description:** The secondary machine and the host can work normally under the same channel. When the host is closed, the secondary machine stops working.

- 1. Unlock Settings:** Hold down the 'Unlock' key, the 'Lock' symbol disappears on the display, indicating that the unlock is successful.
- 2. Channel adjustment:** After unlocking, press the 'Up' or 'Down' key to switch to the required channel.
- 3. MIC volume adjustment:** After unlocking, press the 'Mic.gain' key to adjust the microphone input volume.
- 4. Mute setting:** In normal working state, press and hold the 'mute' key for 3 seconds, and the microphone is in the mute state. Press this key again to unmute.
- 5. Power adjustment:** hold down the 'Mic.Gain' key and the 'Up' key at the same time, and turn on the device, the display will display 'H', indicating high power, repeat the operation after shutting down, and the display 'L' indicates low power.
- 6. Set the frequency band:** press and hold Down the "Up" and "Down" keys at the same time, and turn on the screen, the frequency will be displayed instantly. Repeat this cycle to the desired frequency range.
- 7. Headset volume adjustment:** Without unlocking, press 'Up' or 'Down' to adjust the output volume of the headset directly.
- 8. Intercom mode setting:** hold Down the 'Mic.Gain' key and 'Down' key at the same time, and turn on the device, the display displays 'P', indicating that you hold down and speak. After shutdown, repeat the operation. If 'S' is displayed, press to speak.

## **Radiation Exposure Statement:**

This device meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. The SAR limit of USA (FCC) is 1.6 W/kg averaged. Device types: Transmitter and Receiver (FCC ID: 2BHR7-PT1600) has also been tested against this SAR limit. SAR information can be viewed on-line at <http://www.fcc.gov/oet/ea/fccid/>. Please use the device FCC ID number for search. This device was tested simulation typical 0mm to body.

To maintain compliance with FCC RF exposure requirements, the use of accessories should maintain a separation distance between the user's bodies mentioned above, the use of accessories should not contain metallic components in its assembly, the use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

For body worn operation, this device has been tested and meets the IC RF exposure guidelines when used with an accessory designated for this product or when used with an accessory that contains no metal and that positions the handset a minimum of 0mm from the body. Noncompliance with the above restrictions may result in violation of RF exposure guidelines.

Pour un fonctionnement monté sur le corps, l'appareil a été testé pour répondre aux directives d'exposition IC RF lorsqu'il est utilisé avec les accessoires spécifiés pour ce produit ou lorsqu'il fonctionne avec des accessoires qui ne contiennent pas de métal et dont le téléphone est situé à au moins 0 mm du corps. Le non - respect des restrictions ci - dessus peut entraîner une violation des directives d'exposition aux RF.

## **FCC Warning**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,

uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## **IC WARNING**

This device contains licence-exempt transmitter(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L' émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d' Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L' exploitation est autorisée aux deux conditions suivantes:

1. L' appareil ne doit pas produire de brouillage;
2. L' appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d' en compromettre le fonctionnement.